



• Plug & Play with Videosec NVRs - zero configuration



Board HD Lens
f=4mm/F1.5
Horizontal Angle: 68°

ICS-20 Series 1080p 1/2.7" CMOS
Full HD • Real-time

ID-20 Series 1080p 1/2.7 CMOS
Full HD • Real-time • Compact

ICS-20F 1080p-15fps / 720p-30fps

ICS-25F 1080p-30fps



Box CS Mount H.264 IP Camera




ID-20 1080p-15fps / 720p-30fps

ID-25 1080p-30fps

Dome H.264 IP Indoor Camera

Dimension

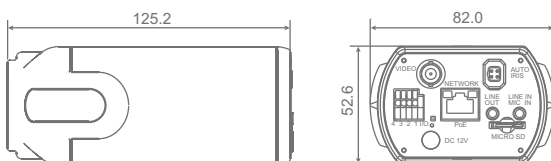


Unit: (mm)

Features: pixel size 3x3µm=9µm²

- Progressive Scan 1/2.7" CMOS Sensor (Ratio: 16:9)
- NEW** • Full HD 1080p / HD 720p real-time at dual streaming
- NEW** • H.264 and MJPEG compression • 1920(H)x1080(V)
- Motion Detection • 2 Way Audio • Alarm: IN/OUT
- Privacy Masks • Internet Explorer, Chrome, Fire Fox
- Day/Night (ICR) • Min. Illumination: 0.02Lux
- Auto Iris Lens support • Shutter: 1~1/10000sec
- NEW** • Micro SD support • ATW 1500~15000K • FTP Recording
- NEW** • BNC analog output • Power: DC 12V / PoE (802.3af), 4W+
- ONVIF support • Max. 20 Users

Dimension

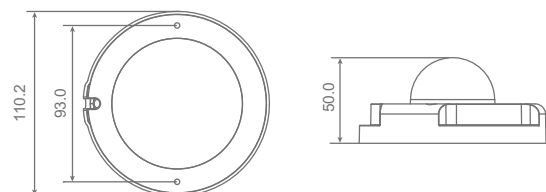

Unit: (mm)

Features pixel size 3x3µm=9µm²

- Progressive Scan 1/2.7" CMOS Sensor (Ratio:16:9)
- NEW** • Full HD 1080p / HD 720p real-time at dual streaming
- H.264 and MJPEG compression • 1920(H)x1080(V)
- NEW** • f = 4 mm, F1.5 • Min. Illumination: 0.02Lux
- Power over Ethernet (802.3af) • FTP Recording
- Motion Detection • 1 Way Audio
- Privacy Masks • Internet Explorer, Chrome, Fire Fox
- Shutter: 1~1/10000sec • ATW 1500~15000K
- Indoor (IP-66 international)
- Micro SD support • Power: PoE only, 4W+
- NEW** • Security Torx against tampering • Max. 20 Users
- ONVIF support