




# IPW-2124L-40

## 4MP IR Mini Bullet Network PoE Camera



- Day/night functionality
- Smart IR , up to 30 m IR distance
- Optical glass window with higher light transmittance
- IR anti-reflection window to increase the infrared transmittance
- 2D/3D-DNR (Digital Noise Reduction)
- H.265, H.264, MJPEG triple streams + SmartEncode
- Embedded smart algorithm
- 9:16 corridor format
- ONVIF Conformance
- Wide temperature range: -30°C to 60°C
- Wide voltage range of ±25%
- IP66
- Junction Box: JB05-IN

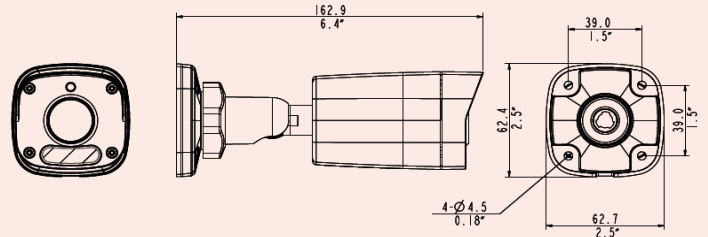

### Specifications

Sensor	1/3", 4.0 megapixel, progressive scan, CMOS
Shutter	Auto/Manual, 1/6~1/1000000 s
Lens	4mm@F1.8 Angle of view(H): 78.9°
Min. Illumination	Colour: 0.02 Lux (F1.8, AGC ON), 0 Lux with IR
Day/Night	IR-cut filter with auto switch (ICR)
IR Range	Up to 30m IR range
S/N	>52 dB
WDR	Digital WDR
Noise Reduction	2D/3D-DNR
Max. Resolution	2592 × 1520
Video Compression	H.265 + Smart Encode, H.264, MJPEG
Frame Rate	4MP (2592×1520): Max. 20 fps; 4MP (2560×1440): Max. 25 fps; 3MP (2048×1520): Max. 30 fps; 1080P (1920×1080): Max. 30 fps
9:16 Corridor Mode / ROI	Supported / Supported
Video Streaming	Triple
OSD	Up to 8 OSDs
Privacy Mask	Up to 8 areas
Motion Detection	22x18 grid / 4 area
General functions	Watermark, IP Address Filtering, Tampering Alarm, Access Policy, ARP Protection, RTSP Authentication, User Authentication,
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SSL, TLS, (Telnet default: OFF)
Compatible Integration	ONVIF, API
Network	1 RJ45 10M/100M Base-TX Ethernet
Power	12 V DC ±25%, or PoE (IEEE802.3 af), Power consumption: Max. 5.5 W
Dimensions (Ø x H), Weight	167.3 × 62.9 × 62,7 mm, 0.25 kg
Working Environment	-30°C ~ +60°C, Humidity ≤ 95% RH(non-condensing)
Ingress Protection	IP66