


Videosec®



CP-5000-VI

Model	CP5000-VI
Input Voltage	AC 100~240V, 50-60Hz
Output Voltage	DC12V
Total Output Current	5A
Ripple & Noise	<=120mv
Efficiency	>=88%
Output Plug	5.5*2.1mm
Storage Temperature	-40—85℃
Operating Temperature	-20—60℃
Product Net Weight	443.3g
Product Dimension	119.4*53*39mm
Certificate	UL,CEC,CE,FCC, SAA
Warranty	5 Year

* this is **Level VI efficiency**, Certified Power Adapter

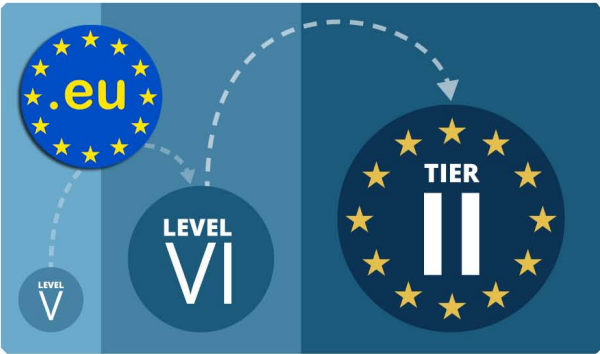

LEVEL VI

Regulates active mode efficiency performance at:

25%
LOAD

50%
LOAD

75%
LOAD

100%
LOAD

United States Department of Energy (DoE)

No-load power draw requirements enforced by DoE Level VI

1~49 W
SINGLE VOLTAGE

50~250 W
SINGLE VOLTAGE

>250 W
SINGLE VOLTAGE

≤ 0.1 W

≤ 0.21 W

≤ 0.5 W

CoC TIER 2

Regulates active mode efficiency performance at:

10%
LOAD

25%
LOAD

50%
LOAD

75%
LOAD

100%
LOAD

United States Department of Energy (DoE)

CoC Tier 2 tightens Level VI no-load power draw requirements

1~49 W
SINGLE VOLTAGE

50~250 W
SINGLE VOLTAGE

>250 W
SINGLE VOLTAGE

≤ 0.075 W

≤ 0.15 W

N/A