

Videosec®




CP-1205000-4



Model	CP1205000-4
Input Voltage	AC 100~240V, 50-60Hz
Output Voltage	DC11V-15V adjustable
Total Output Current	5A
Total Output Channel	4CH
Fuse type	PTC Resettable
Fuse Rating	2A
Ripple & Noise	<=120mv
Efficiency	>=88%
Storage Temperature	-40 — 85°C
Operating Temperature	-20 — 60°C
Certificate	UL,VI,CE,FCC, CEC
Product Net Weight	419g
Product Dimension	138.6*54.8*37mm
Warranty	5 Year

* this is **Level VI efficiency**, Certified Power Adapter

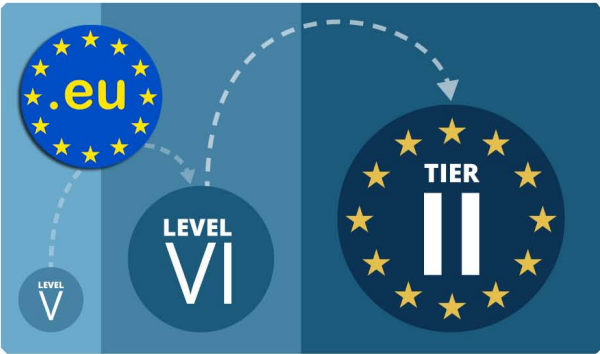

LEVEL VI	CoC TIER 2
Regulates active mode efficiency performance at:	Regulates active mode efficiency performance at:
25% LOAD 50% LOAD 75% LOAD 100% LOAD	10% LOAD 25% LOAD 50% LOAD 75% LOAD 100% LOAD
United States Department of Energy (DoE)	
No-load power draw requirements enforced by DoE Level VI	
CoC Tier 2 tightens Level VI no-load power draw requirements	
1~49 W SINGLE VOLTAGE ≤ 0.1 W 50~250 W SINGLE VOLTAGE ≤ 0.21 W >250 W SINGLE VOLTAGE ≤ 0.5 W	1~49 W SINGLE VOLTAGE ≤ 0.075 W 50~250 W SINGLE VOLTAGE ≤ 0.15 W >250 W SINGLE VOLTAGE N/A